

## PATENT COOPERATION TREATY

From the INTERNATIONAL SEARCHING AUTHORITY

To:

KIM, Won-Joon

5F., Shinwon B/D., 648-15 Yeoksam-dong, Kangnam-gu Seoul  
135-911 Republic of Korea

PCT

NOTIFICATION OF RECEIPT  
OF SEARCH COPY

(PCT Rule 25.1)

Date of mailing  
(day/month/year) 21 JULY 2006 (21.07.2006)

Applicant's or agent's file reference

PCT06-04

## IMPORTANT NOTIFICATION

International application No.

PCT/KR2006/002349

International filing date (day/month/year)

20 JUNE 2006 (20.06.2006)

Priority date (day/month/year)

21 JUNE 2005 (21.06.2005)

Applicant

U-GENTECH CO., LTD et al

## 1. Where the International Searching Authority and the receiving Office are not the same Office:

The applicant is hereby notified that the search copy of the international application was received by this International Searching Authority on the date indicated below.

## Where the International Searching Authority and the receiving Office are the same Office:

The applicant is hereby notified that the search copy of the international application was received on the date indicated below.

19 JULY 2006 (19.07.2006)

(date of receipt).

2. ☐ The search copy was accompanied by nucleotide and/or amino acid sequence listing or tables related thereto in electronic form.3. ☐ The search copy contained a nucleotide and/or amino acid sequence listing or tables related thereto in electronic form.4. Time limit for establishment of international search report and written opinion of the International Searching Authority  
The applicant is informed that the time limit for establishing the international search report and the written opinion of the International Searching Authority is three months from the date of receipt indicated above or nine months from the priority date, whichever time limit expires later (Rules 42.1 and 43bis.1(a)).

5. A copy of this notification has been sent to the International Bureau and, where the first sentence of paragraph 1 applies, to the receiving Office.

Name and mailing address of ISA/KR



 Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

COMMISSIONER

- Telephone No. 82-42-481-5762



## PCT REQUEST

Print Out (Original in Electronic Form)

0	For receiving Office use only	
0-1	International Application No.	
0-2	International Filing Date	
0-3	Name of receiving Office and "PCT International Application"	
0-4	Form PCT/RO/101 PCT Request	
0-4-1	Prepared Using	PCT-SAFE Version 3.50 (Build 0002.170)
0-5	Petition	
	The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	Korean Intellectual Property Office (RO/KR)
0-7	Applicant's or agent's file reference	PCT06-04
I	Title of Invention	MICRO SPEAKER UNIT
II	Applicant	
II-1	This person is	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	U-GENTECH CO., LTD
II-5	Address	74-1 Sinchun 3-dong, Dong-gu, Daegu Daegu701-825 Republic of Korea
II-6	State of nationality	KR
II-7	State of residence	KR
II-8	Telephone No.	82-2-514-7676
II-9	Facsimile No.	82-2-512-8791
III-1	Applicant and/or inventor	
III-1-1	This person is	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	KANG, Yoo-Mi
III-1-5	Address	102-1001 Hui-m Apt., 801 Sakjeon 2-dong, Gyeyang-gu Incheon407-823 Republic of Korea
III-1-6	State of nationality	KR
III-1-7	State of residence	KR

## PCT REQUEST

Print Out (Original in Electronic Form)

IV-1	<b>Agent or common representative; or address for correspondence</b> The person identified below is hereby/ has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name (LAST, First)	KIM, Won-Joon
IV-1-2	Address	5F., Shinwon B/D., 648-15 Yeoksam-dong, Kangnam-gu Seoul135-911 Republic of Korea
IV-1-3	Telephone No.	82-2-555-2623
IV-1-4	Facsimile No.	82-2-555-2621
IV-1-5	e-mail	ceo@finepat.com
IV-1-6	Agent's registration No.	9-2000-000412-1
V	<b>DESIGNATIONS</b>	
V-1	The filing of this request constitutes under Rule 4.9(a), the designation of all Contracting States bound by the PCT on the international filing date, for the grant of every kind of protection available and, where applicable, for the grant of both regional and national patents.	
V-2	Item V-2 may be used to exclude (irrevocably) the designations concerned in order to avoid the ceasing of the effect, under the national law, of an earlier national application from which priority is claimed. As to the consequences of such national law provisions in these and certain other States, see Designations in PCT-SAFE Help.	KR
VI-1	<b>Priority claim of earlier national application</b>	
VI-1-1	Filing date	21 June 2005 (21.06.2005)
VI-1-2	Number	10-2005-0053283
VI-1-3	Country	KR
VI-2	<b>Priority claim of earlier national application</b>	
VI-2-1	Filing date	20 June 2006 (20.06.2006)
VI-2-2	Number	10-2006-0055204
VI-2-3	Country	KR
VII-1	<b>International Searching Authority Chosen</b>	Korean Intellectual Property Office (ISA/KR)

**【DESCRIPTION】****【Invention Title】**

MICRO SPEAKER UNIT

**【Technical Field】**

- <1> The present invention relates to a micro speaker unit, and in particular to a micro speaker unit which is capable of protecting a human body from a magnetic field which occurs from a micro speaker.

**【Background Art】**

- <2> Generally, a micro speaker unit is designed to generate sounds based on intensive air waves which are generated in such a manner that a diaphragm vibrates surrounding air, with the diaphragm being vibrated by an attractive force and a repulsive force which occur by a polar change of current applied to a moving coil with respect to a magnetic field of a magnet.

- <3> Here, a magnetic field generated by the micro speaker unit is harmful to a human body.

- <4> So, a certain construction is urgently needed for protecting a human body from a harmful magnetic field which occurs from a micro speaker unit.

- <5> In order to decrease a harmful magnetic field generating from a micro speaker unit, a micro speaker unit is connected with a user's ear using a thin hose, while keeping a certain distance from a human body.

- <6> However, the method of connecting a micro speaker unit and a user's ear using a hose has a problem that a degradation of a sound characteristic cannot be overcome due to surrounding noises applied to a hose.

- <7> In addition, the method of connecting a micro speaker unit and a user's ear using a hose should be additionally provided with a hose, the construction becomes complicated.

**【Disclosure】****【Technical Problem】**

- <8> Accordingly, it is an object of the present invention to provide a micro speaker unit which overcomes the problems encountered in the conventional art.

<9> It is another object of the present invention to provide a micro speaker unit which is capable of protecting a human body from harmful magnetic fields which occur from a micro speaker unit.

**【Technical Solution】**

<10> To achieve the above objects, there is provided a micro speaker unit which comprises a frame in which a receiving part is formed at a center portion of the same, and a plurality of damping holes are formed at an outer side of the receiving part at certain intervals; a diaphragm which is provided at the receiving part for generating vibrations; a magnet which is installed in an interior of the diaphragm; a protector which is coupled at the frame for thereby covering the receiving part and the damping hole of the frame; a moving coil which is installed at a center portion of the protector and corresponds to the magnet; and a magnetic field radiating part which is provided at the frame for radiating magnetic fields generated by the magnet and the moving coil to the outside of the frame.

**【Advantageous Effects】**

<11> The present invention can be well adapted to a cellular phone, a head set or an earphone. An applicable range of the present invention is very wide and diverse.

<12> In addition, the magnetic fields generated from the micro speaker are radiated in an outer direction, so that it is possible to protect a human body from magnetic fields.

<13> The magnetic fields generated from the micro speaker are radiated in a direction reverse to a human body by the magnetic field radiating part provided at the micro speaker, so that the magnetic fields do not influence a human body.

**【Description of Drawings】**

<14> The present invention will become better understood with reference to the accompanying drawings which are given only by way of illustration and thus are not limitative of the present invention, wherein;

<15> Figure 1 is a perspective view illustrating a micro speaker unit

according to the present invention;

<16> Figure 2 is a disassembled perspective view illustrating a micro speaker unit according to the present invention;

<17> Figure 3 is a cross sectional view illustrating a micro speaker unit according to the present invention; and

<18> Figure 4 is a disassembled sectional view illustrating a micro speaker unit according to the present invention.

**【Best Mode】**

<19> The preferred embodiments of the present invention will be described with reference to the accompanying drawings.

<20> Figure 1 is a perspective view illustrating a micro speaker unit according to the present invention. Figure 2 is a disassembled perspective view illustrating a micro speaker unit according to the present invention. Figure 3 is a cross sectional view illustrating a micro speaker unit according to the present invention. Figure 4 is a disassembled sectional view illustrating a micro speaker unit according to the present invention.

<21> As shown in Figures 1 through 4, a circular frame 10 is provided. A receiving part 11 (receiving groove) is formed at a center portion of the frame 10 with a certain depth. A plurality of damping holes 13 are formed at an outer portion of the receiving part 11 at certain regulars in a radial shape. Here, multiple damping holes 13 are provided for increasing an aperture ratio so that sounds can be efficiently outputted to a backside of the speaker.

<22> A diaphragm 17 is provided at the receiving part 11 of the frame 10 to generate vibrations. A magnet 15 is installed in the interior of the diaphragm 17. A protector 20 is coupled at the frame 10 so that the receiving part 11 and the damping holes 13 are covered. The vibrations of the diaphragm 17 are controlled by an aperture ratio of the damping holes 13, so that the quality of sounds is controlled.

<23> A moving coil 21 is installed at a center portion of the protector 20, while corresponding to the magnet 15 received in the receiving part 11. A

magnetic field radiating hole 31 of a magnetic field radiating part 30 is formed at a center portion of the frame 10 for radiating magnetic field generating by the magnet 15 and the moving coil 21 to the outside of the frame 10. A magnetic field guide path 16 having the same diameter as the magnetic field radiating hole 31 is formed at a center portion of the magnet 15.

<24> A spacer 40 is provided in the interior of the frame 10 so as to maintain a certain distance between the frame 10 and the diaphragm 17.

<25> A cover 50 is coupled at a backside of the frame 10 to protect the inner constructions of the frame 10. A cover hole 51 is formed at a center portion of the cover 50 so that a user can hear sounds. Here, the protector 20 and the cover 50 may be integrally formed. The protector 20 is closely contacted with the frame 10 so that the spaces between the frame 10 and the cover 50 are separated.

<26> The operation and effect of the present invention will be described as follows.

<27> In the present invention, as intensive air waves are generated in the air of the front side of the diaphragm 17 based on a cooperation between the magnet 15 and the moving coil 21, the magnetic field generated by the magnet 15 are radiated in an outer direction of the speaker through the magnetic field guide path 16 and the magnetic field radiating hole 31 of the magnetic field radiating part 30 formed at the center of the frame 10.

<28> Here, since the magnetic field is radiated in a direction reverse to a human, the user is protected from the magnetic field by the magnetic field radiating part 30.

<29> In the present invention, since the aperture ratio of the frame 10 increases by the damping holes 13, the diaphragm 17 is restricted from its free vibrations. The user can hear sounds from the cover hole 51 formed at the center of the cover 50. Noises are discharged by the damping hole 13 of the frame 10 positioned at the front side of the cover 50, and a good quality of sounds is transferred to the user's ear by the cover hole 51 of the cover

50.

**【Industrial Applicability】**

<30> As described above, the present invention can be well adapted to a cellular phone, a head set or an earphone. An applicable range of the present invention is very wide and diverse.

<31> In addition, the magnetic fields generated from the micro speaker are radiated in an outer direction, so that it is possible to protect a human body from magnetic fields.

<32> The magnetic fields generated from the micro speaker are radiated in a direction reverse to a human body by the magnetic field radiating part provided at the micro speaker, so that the magnetic fields do not influence a human body.

<33> As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described examples are not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the meets and bounds of the claims, or equivalences of such meets and bounds are therefore intended to be embraced by the appended claims.



**【CLAIMS】****【Claim 1】**

A micro speaker unit, comprising:

a frame 10 in which a receiving part 11 is formed at a center portion of the same, and a plurality of damping holes 13 are formed at an outer side of the receiving part 11 at certain intervals;

a diaphragm 17 which is provided at the receiving part 11 for generating vibrations;

a magnet 15 which is installed in an interior of the diaphragm 17;

a protector 20 which is coupled at the frame 10 for thereby covering the receiving part 11 and the damping hole 13 of the frame 10;

a moving coil 21 which is installed at a center portion of the protector 20 and corresponds to the magnet 15; and

a magnetic field radiating part 30 which is provided at the frame 10 for radiating magnetic fields generated by the magnet 15 and the moving coil 21 to the outside of the frame 10.

**【Claim 2】**

The unit of claim 1, wherein said magnetic field radiating part 30 includes:

a magnetic field radiating hole 31 which is formed at a center portion of the frame 10; and

a magnetic field guide path 16 which is formed at a center portion of the magnet 15 and has the same diameter as the magnetic field radiating hole 31.

**【Claim 3】**


The unit of claim 1, further comprising a cover 50 which is coupled at the frame 10 for thereby covering the protector 20 and has a cover hole 51 formed at a center portion of the same for transferring sounds.

## 【ABSTRACT】


A micro speaker unit is disclosed, which is capable of protecting a human body from harmful magnetic fields which occur from a micro speaker unit. The micro speaker unit comprises a frame in which a receiving part is formed at a center portion of the same, and a plurality of damping holes are formed at an outer side of the receiving part at certain intervals; a diaphragm which is provided at the receiving part for generating vibrations; a magnet which is installed in an interior of the diaphragm; a protector which is coupled at the frame for thereby covering the receiving part and the damping hole of the frame; a moving coil which is installed at a center portion of the protector and corresponds to the magnet; and a magnetic field radiating part which is provided at the frame for radiating magnetic fields generated by the magnet and the moving coil to the outside of the frame.

【DRAWINGS】


【Figure 1】

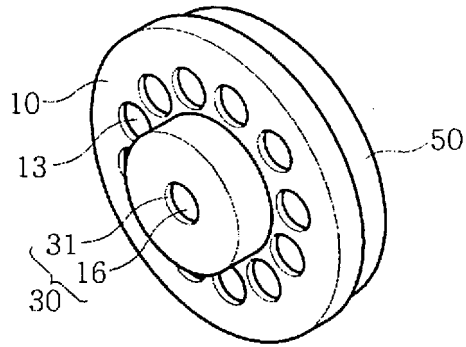

【Figure 2】

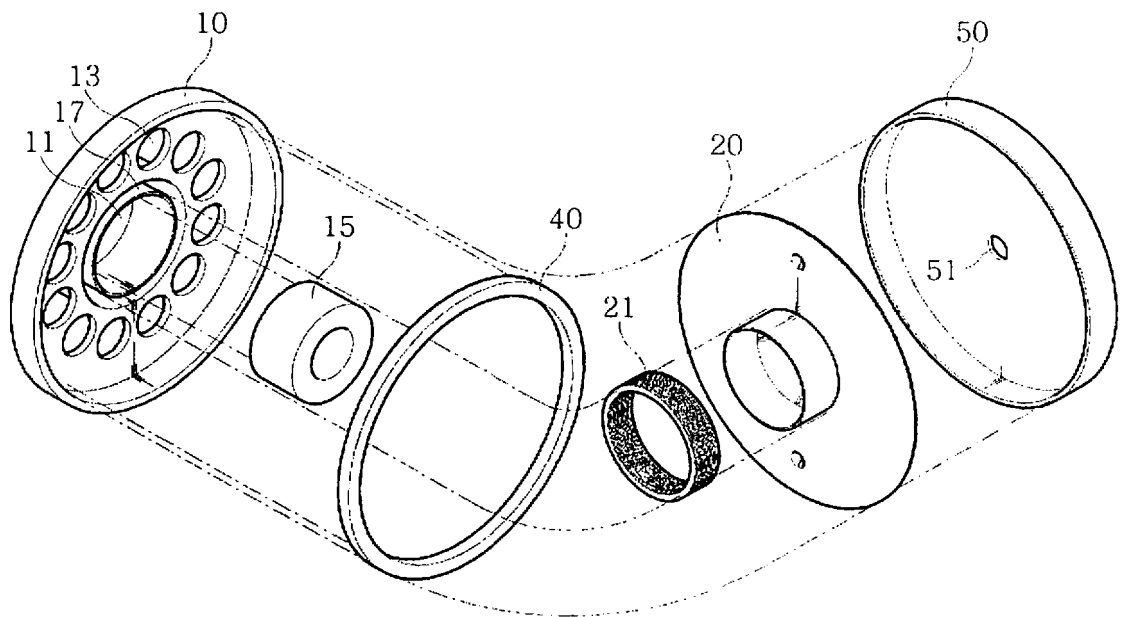

【Figure 3】

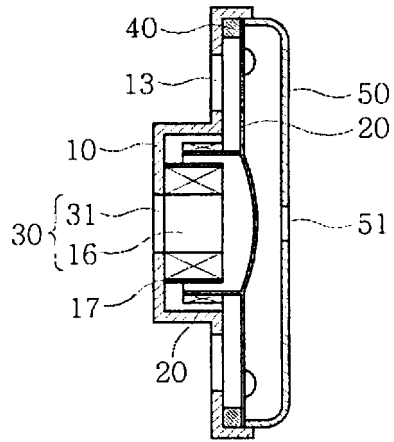

【Figure 4】

